



an ISO 9001-2008 company

SWIFTS Pvt. Ltd.


Registered Office / Works :

B-37, NICE, MIDC, Satpur,
Nashik - 422 007
Tel. : 91 - 253 - 2360012
E-mail : sales@swiftoffsets.com
vasant@swiftoffsets.com

Mumbai Office

Marathe Udyog Bhavan,
Appasaheb marathe Marg,
Prabhadevi, Mumbai-400 025
Te. : + 91 22 24301342 / 2089 / 2453
Fax : + 91 22 24379863
Mobile : 93236 47329

AUTHORISED DEALER / AGENT

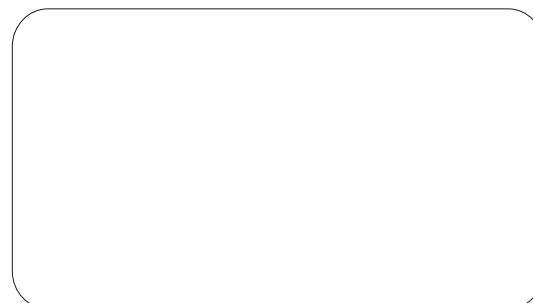

SWIFTS MULTILITH 1250



2-IN-1
OFFSET

SWIFTS MULTILITH 1250

SWIFTS has a technical collaboration with **Multigraphics USA**, to manufacture globally popular Multilith 1250 in India. Now MULTILITH 1250 is available as SWIFTS MULTILITH 1250 with upgraded version. Understanding the customer needs SWIFTS further developed variety of attachments for SWIFTS MULTILITH 1250 in its 2-in-1 series. A standard SWIFTS MULTILITH 1250 with chute delivery can be converted into continues form printing unit or numbering perforating unit independently as well as simultaneously. The machine can also switch on from sheet printing to computer stationary printing with the help of attachment, thus maintaining great flexibility for both media i.e. Utilising the concept of **2-in-1**.

SWIFTS MULTILITH 1250 with CD

Newly developed integrated **Chain Delivery** attachment for MULTILITH 1250 will enable printers to accept variety of printing jobs on various stocks of paper thereby utilising the same machine in better manner.



CONTINUOUS FORM ATTACHMENT (CFA)

- Easy and quick fitment with the machine without mechanical or electrical changes.
- Easy change over from sheet feed to continuous form mode.
- Faster make ready
- Economical for short run continuous form jobs.

Paper weight	60-200 gsm
Min. Paper Size	127 x 152 mm (5"x6")
Max. Paper Size	254 x 304 mm (10"x12")
Min. Printing Area	114 x 139 mm (4.5"x 5.5")
Max. Printing Area	241 x 292 mm (9.5"x11.5")
Production (Max.)	4000 iph*
Dimension	400 x 300 x 250 mm
Weight	18 kg.

NUMBERING & PERFORATING ATTACHMENT (NPD)

- Easy and quick fitment with the machine
- Faster make ready
- Online attachment facilities reduction in repetitive handling.
- Online imprinting facility.
- Integral perforating facility for simultaneous vertical perforations.



Paper weight	50-200 gsm
Min. Paper Size	127 x 152 mm (5"x6")
Max. Paper Size	279 x 432 mm (11"x17")
Production (Max.)	6000 iph*
Dimension	430 x 350 x 350 mm
Weight	18 kg.
Max. Numbering boxes Horizontal / Vertical	4 each

SPECIFICATIONS

Max. Paper Size	279 x 432 mm (11"x17") or
	254 x 381 mm (10"x15")
Min. Paper Size	76 x 127 mm (3"x5")
Max. Printing Area	267 x 419 mm (10.5"x16.5") or
	241 x 355 mm (9.5 x 14")
Stock Handled	40 to 200 gsm
Plate Size	297 x 454 mm or
	260 x 405 mm
Plate Thickness	0.05 to 0.2 mm
Blanket	4 Ply (1.9 mm thick)
Max. Speed	10,000 I.P.H.*
Gripper Margin on Paper	8 mm
Gripper Margin on Plate	25 mm
Electrical Requirement	230v AC, 50Hz, 15 Amp
Drive Motor	0.5 HP (D.C.)
Pump Motor	0.5 HP (A.C.)
Feeder Stacking Height	530 mm

SWIFTS Multilith 1250

Weight : Approx. 375 kg.

Dimensions : (LxWxH)
1520x700x1370 mm

SWIFTS Multilith 1250 with C.D.

Weight : Approx. 425 kg.

Dimensions : (LxWxH)
1829 x 700 x 1370 mm

* Actual printing speed depends upon thickness, size, condition of stock to be run, accuracy of register required and other operating conditions. Due to our policy of continuous products development, design and specifications may be modified or upgraded without notice.